

# Industrial Hydraulic Pumps T7DBB, T7DBBS

Hydraulic Pumps

**Parker**



# Industrial Hydraulic Pumps T7DBB, T7DBBS

Hydraulic Pumps

**Parker**

**Model No. T7DBB or T7DBBS - B38 - B14 - B08 - 1 R 00 - A 1 - M1 - ..**

**T7DBB series** - ISO 6 bolts 3019-2  
Mounting flange 125-A2-HW or 125-B4-HW

**T7DBBS series** - SAE C 6 bolts  
J744 mounting flange

**Displacement for "P1"**

Volumetric displacement (ml/rev)

B14 = 44,0    B31 = 99,2  
B17 = 55,0    B35 = 113,4  
B20 = 66,0    B38 = 120,6  
B22 = 70,3    B42 = 137,5  
B24 = 81,1    045 = 145,7  
B28 = 90,0    050 = 158,0

**Displacement for "P2" & "P3"**

Volumetric displacement (ml/rev)

B02 = 5,8    B09 = 28,0  
B03 = 9,8    B10 = 31,8  
B04 = 12,8    B11 = 35,0  
B05 = 15,9    B12 = 41,0  
B06 = 19,8    B14 = 45,0  
B07 = 22,5    B15 = 50,0  
B08 = 24,9

**Type of shaft T7DBBS**

1 = keyed (non SAE)  
2 = keyed (SAE CC)  
3 = splined 12/24 (SAE C) (14 teeth)  
4 = splined 12/24 (SAE CC) (17 teeth)

**Type of shaft T7DBB & T7DBBS**

5 = keyed (ISO 3019/2 - G38M)

**Modifications**

**Mounting w/connection variables**  
4 bolts SAE flange J518

P1 = 1.1/4" - P2 = 1" - S = 4"		
	Metric thread	UNC thread
T7DBB-P3 = 3/4"	M1	
T7DBBS-P3 = 3/4"	M1	01
T7DBB-P3 = 1"	M0	
T7DBBS-P3 = 1"	M0	00

**Seal class**

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)  
4 = S4 EPDM - 7 bar max. (for fire resistant fluids)  
5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

**Design letter**

**Porting combination (see pages 72 - 73)**  
00 = standard

**Direction of rotation (shaft end view)**

R = Clockwise  
L = Counter-clockwise


**OPERATING CHARACTERISTICS - TYPICAL [24 cSt]**

Pressure port	Series	Vi Volumetric displacement	Flow q <sub>v</sub> [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
	045	145,7 ml/rev	218,6	209,2	202,6 <sup>1)</sup>	4,1	52,8	89,5 <sup>1)</sup>
	050	158,0 ml/rev	237,0	227,7	223,0 <sup>2)</sup>	4,4	57,1	85,0 <sup>2)</sup>
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
P2 & P3	B02	5,8 ml/rev	8,7	7,0	5,1	0,5	2,6	5,1
	B03	9,8 ml/rev	14,7	13,0	11,1	0,6	4,0	8,1
	B04	12,8 ml/rev	19,2	17,5	15,6	0,6	5,0	10,4
	B05	15,9 ml/rev	23,9	22,2	20,2	0,7	6,1	12,7
	B06	19,8 ml/rev	29,7	28,0	26,1	0,7	7,5	15,6
	B07	22,5 ml/rev	33,7	32,0	30,2	0,8	8,5	17,6
	B08	24,9 ml/rev	37,4	35,7	33,7	0,8	9,3	19,5
	B09	28,0 ml/rev	42,0	40,3	38,4	0,9	10,4	21,8
	B10	31,8 ml/rev	47,7	46,0	44,1	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9	1,0	12,8	27,0
	B12	41,0 ml/rev	61,5	59,8	57,9	1,1	14,9	31,5
	B14	45,0 ml/rev	67,5	65,8	63,9	1,2	16,3	34,5
	B15	50,0 ml/rev	75,0	73,3	71,6 <sup>3)</sup>	1,3	18,1	35,7 <sup>3)</sup>


<sup>1)</sup> 045 = 240 bar max. int.    <sup>2)</sup> 050 = 210 bar max. int.    <sup>3)</sup> B15 = 280 bar max. int.



### INTERNAL LEAKAGE (TYPICAL)

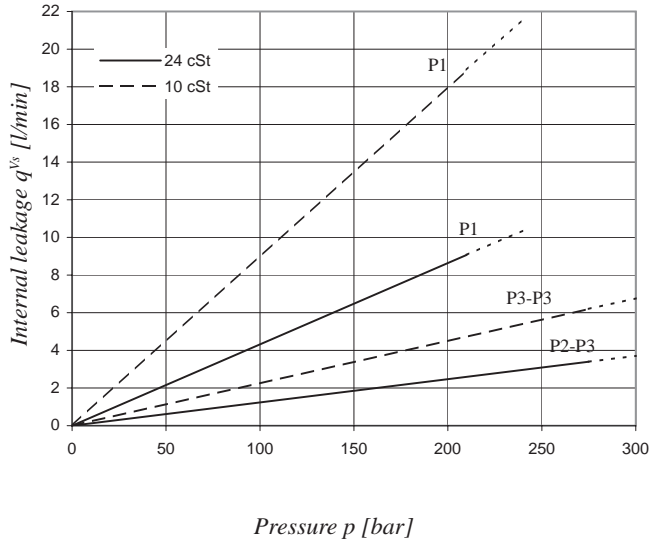


### NOISE LEVEL (TYPICAL) - T7DBB - B38 - B06 - B04

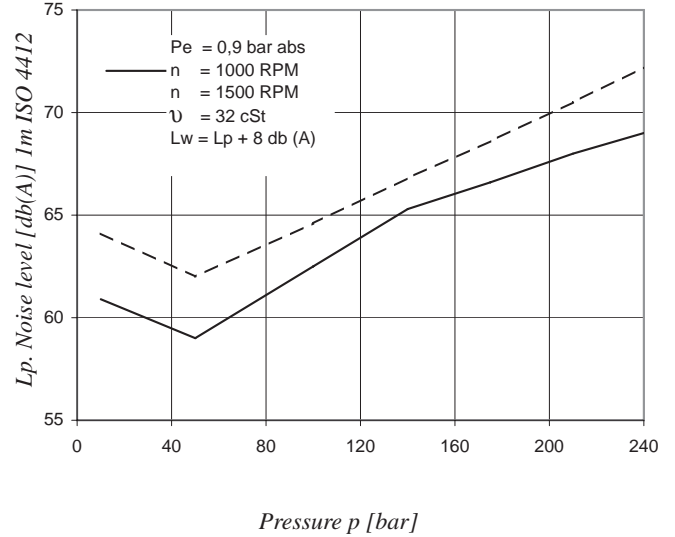


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow. Total leakage is the sum of each section loss under its respective operating conditions.

Triple pump noise level is given with all stages discharging at the pressure value indicated on the curve.

### POWER LOSS HYDROMECHANICAL (TYPICAL)


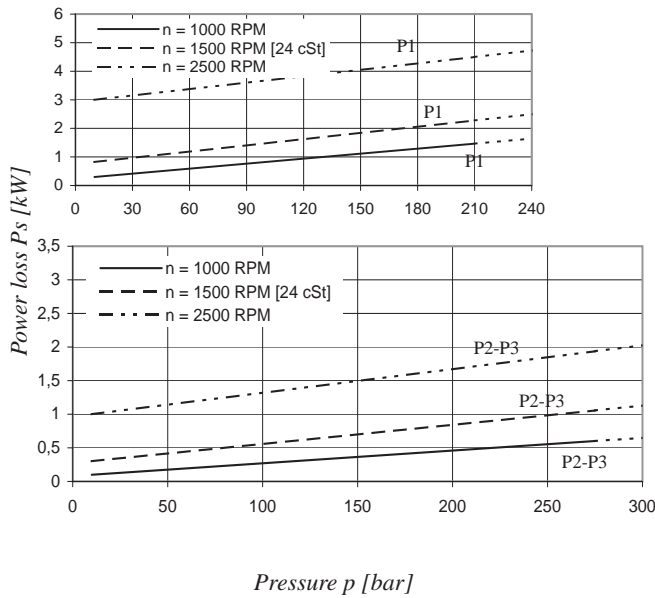


### PERMISSIBLE RADIAL LOAD

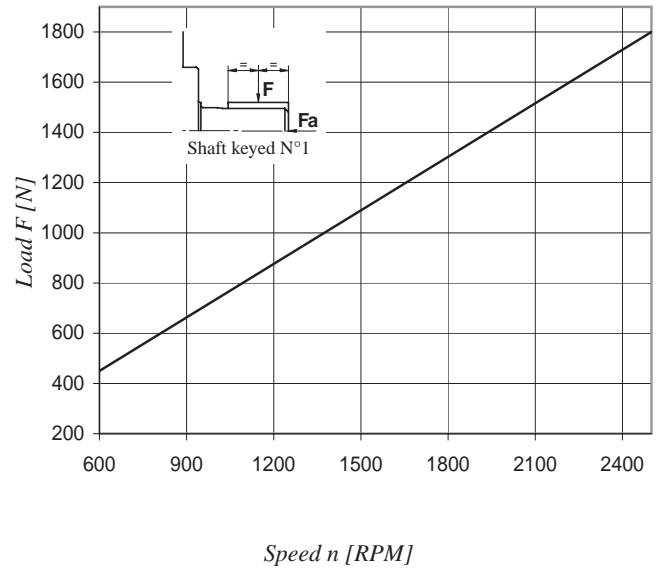

Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

Maximum permissible axial load  $F_a = 1200\text{ N}$

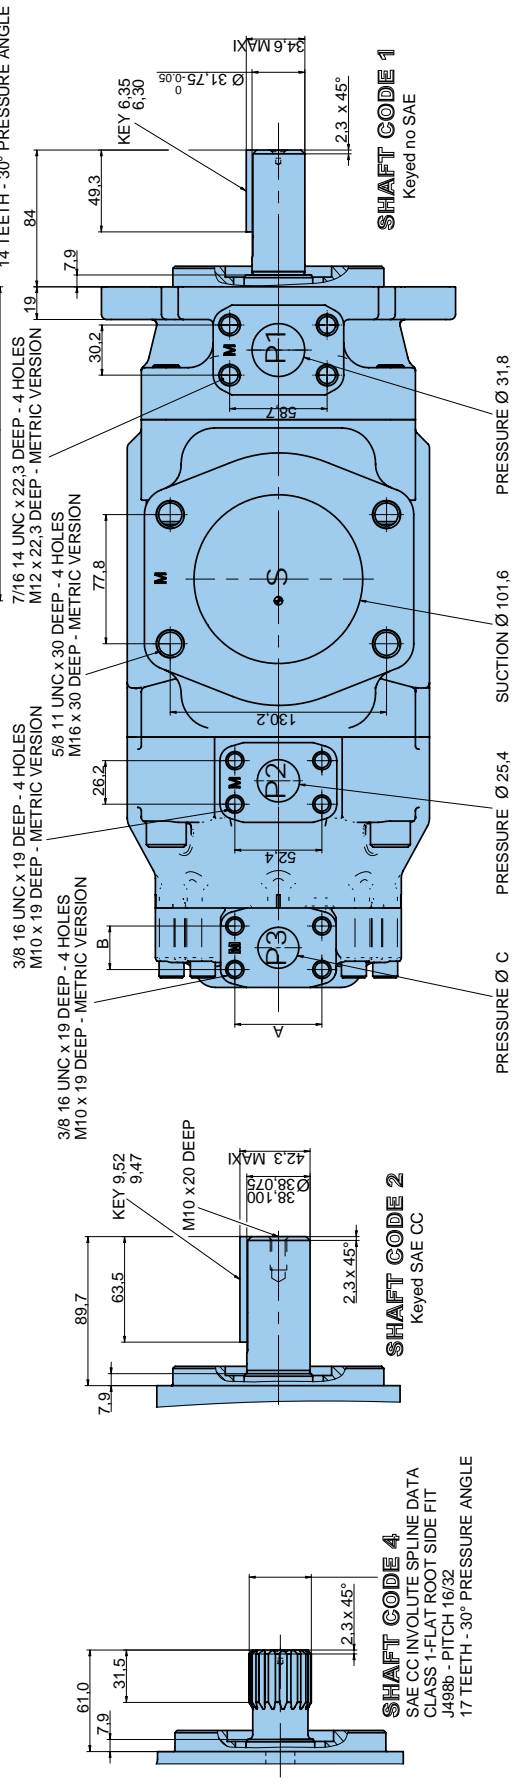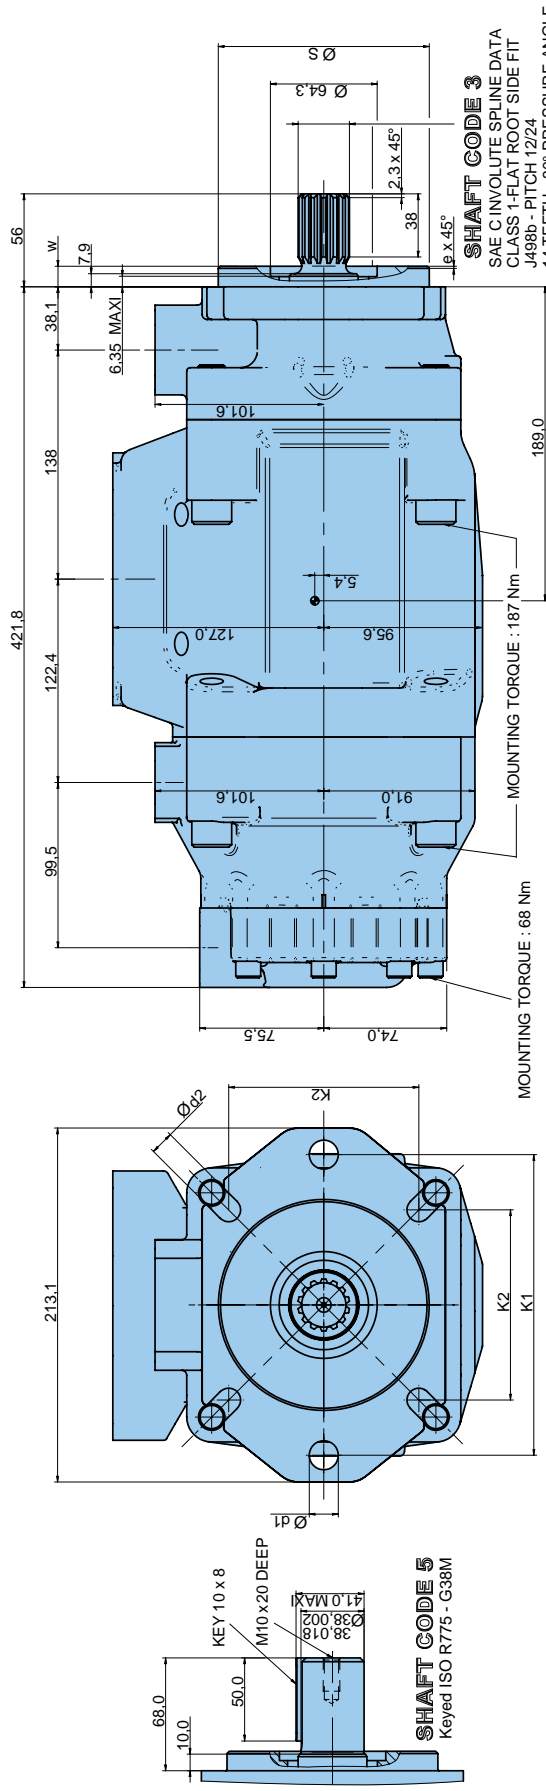

Shaft torque limits [m/rev. x bar]		
Shaft	V i x p max. P1 + P2 + P3	Shaft V i x p max. P1 + P2 + P3
1	43240	4
2	71750	5
3	61200	

Alternate mounting flange						
Series	Dia S		W	K1	K2	Dia d2
	Max.	Min.				
T7DBB - T7DCB - T7DCC	125,000	124,937	2,0	180,0	18,0	113,14
T7DBBS - T7DCBS - T7DCCS	127,000	126,950	1,3	181,0	17,5	114,50

Alternate connect. variables	
	00 & M0 01 & M1
A	52,4
B	26,2
C	25,4