

# Industrial Hydraulic Pumps T7DDB, T7DDBS

Hydraulic Pumps



# Industrial Hydraulic Pumps T7DDB, T7DDBS

Hydraulic Pumps



**Model No. T7DDB or T7DDBS - 050 - B22 - B12 - 1 R 00 - A 1 - M0 - ..**

**T7DDB series** - ISO 6 bolts 3019-2  
Mounting flange 125-A2-HW or 125-B4-HW

**P1 P2 P3**

**T7DDBS series** - SAE C 6 bolts  
J744 mounting flange

**Displacement for "P1" & "P2"**

Volumetric displacement (ml/rev)

B14 = 44,0 B31 = 99,2  
B17 = 55,0 B35 = 113,4  
B20 = 66,0 B38 = 120,6  
B22 = 70,3 B42 = 137,5  
B24 = 81,1 045 = 145,7  
B28 = 90,0 050 = 158,0

**Displacement for "P3"**

Volumetric displacement (ml/rev)

B02 = 5,8 B09 = 28,0  
B03 = 9,8 B10 = 31,8  
B04 = 12,8 B11 = 35,0  
B05 = 15,9 B12 = 41,0  
B06 = 19,8 B14 = 45,0  
B07 = 22,5 B15 = 50,0  
B08 = 24,9

**Type of shaft T7DDBS**

1 = keyed (SAE C)  
2 = keyed (SAE CC)  
3 = splined 12/24 (SAE C) (14 teeth)  
4 = splined 12/24 (SAE CC) (17 teeth)

**Type of shaft T7DDB & T7DDBS**

5 = keyed (ISO 3019/2 - G38M)

**Modifications**

**Mounting w/connection variables**

4 bolts SAE flange J518

P1 & P2 = 1.1/4" - S = 4"		
	Metric thread	UNC thread
T7DDB-P3 = 1"	M0	
T7DDB-P3 = 3/4"	M1	
T7DDBS-P3 = 1"	M0	00
T7DDBS-P3 = 3/4"	M1	01

**Seal class**

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)  
4 = S4 EPDM - 7 bar max. (for fire resistant fluids)  
5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

**Design letter**

**Porting combination (see pages 72 - 73)**

00 = standard

**Direction of rotation (shaft end view)**

R = Clockwise  
L = Counter-clockwise

**OPERATING CHARACTERISTICS - TYPICAL [24 cSt]**

Pressure port	Series	Vi Volumetric displacement	Flow q <sub>v</sub> [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1 & P2	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
	045	145,7 ml/rev	218,6	209,2	202,6 <sup>1)</sup>	4,1	52,8	89,5 <sup>1)</sup>
	050	158,0 ml/rev	237,0	227,7	223,0 <sup>2)</sup>	4,4	57,1	85,0 <sup>2)</sup>
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
P3	B02	5,8 ml/rev	8,7	7,0	5,1	0,5	2,6	5,1
	B03	9,8 ml/rev	14,7	13,0	11,1	0,6	4,0	8,1
	B04	12,8 ml/rev	19,2	17,5	15,6	0,6	5,0	10,4
	B05	15,9 ml/rev	23,9	22,2	20,2	0,7	6,1	12,7
	B06	19,8 ml/rev	29,7	28,0	26,1	0,7	7,5	15,6
	B07	22,5 ml/rev	33,7	32,0	30,2	0,8	8,5	17,6
	B08	24,9 ml/rev	37,4	35,7	33,7	0,8	9,3	19,5
	B09	28,0 ml/rev	42,0	40,3	38,4	0,9	10,4	21,8
	B10	31,8 ml/rev	47,7	46,0	44,1	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9	1,0	12,8	27,0
	B12	41,0 ml/rev	61,5	59,8	57,9	1,1	14,9	31,5
	B14	45,0 ml/rev	67,5	65,8	63,9	1,2	16,3	34,5
	B15	50,0 ml/rev	75,0	73,3	71,6 <sup>3)</sup>	1,3	18,1	35,7 <sup>3)</sup>


<sup>1)</sup> 045 = 240 bar max. int.

<sup>2)</sup> 050 = 210 bar max. int.

<sup>3)</sup> B15 = 280 bar max.int.




### INTERNAL LEAKAGE (TYPICAL)

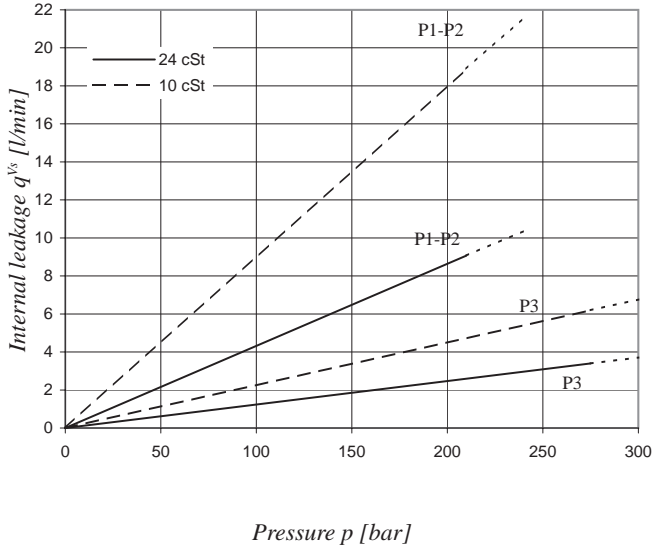


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow. Total leakage is the sum of each section loss under its respective operating conditions.

### NOISE LEVEL (TYPICAL) - T7DDB - B31 - B31 - B10

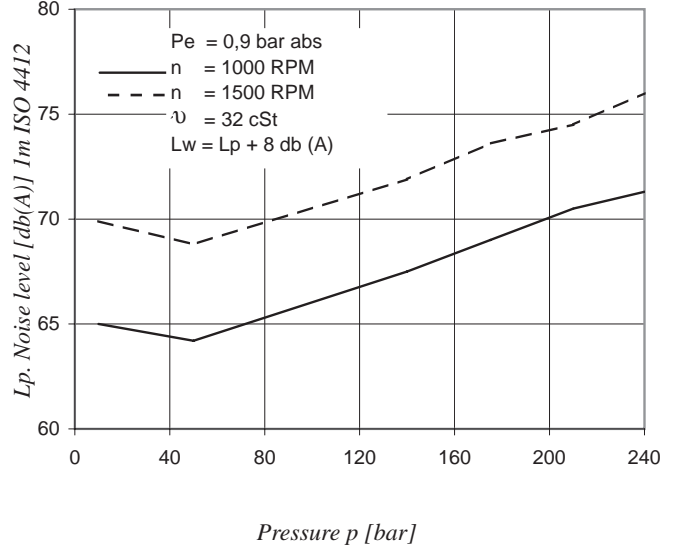


Triple pump noise level is given with all stages discharging at the pressure value indicated on the curve.

### POWER LOSS HYDROMECHANICAL (TYPICAL)

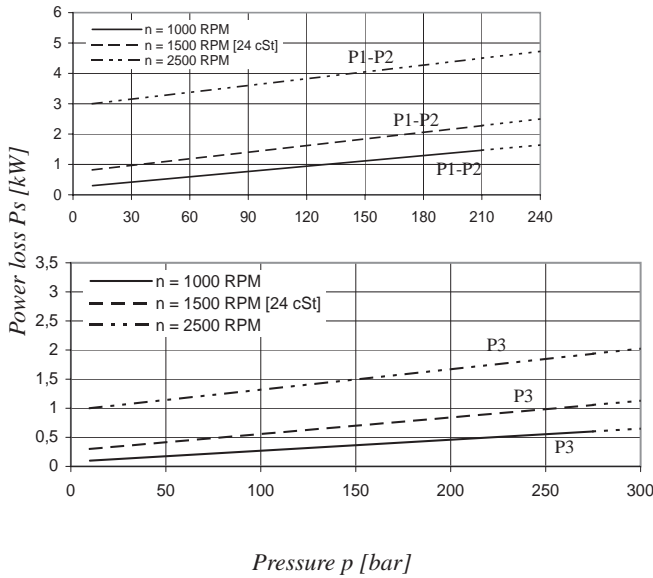


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

### PERMISSIBLE RADIAL LOAD

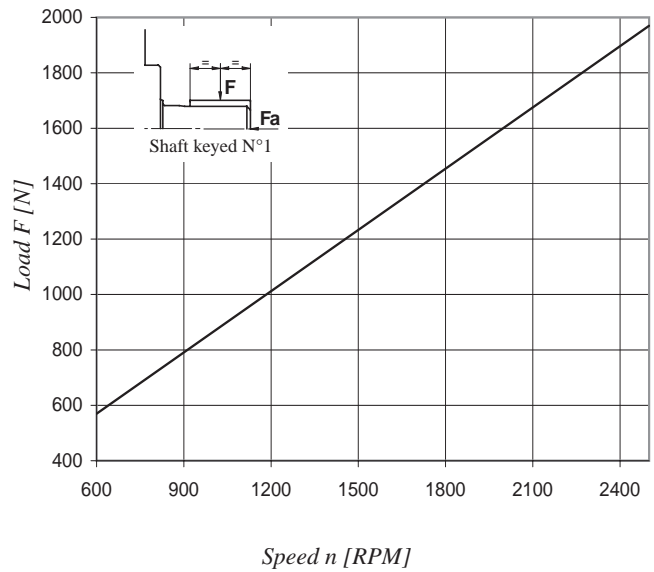

Maximum permissible axial load  $F_a = 1200$  N

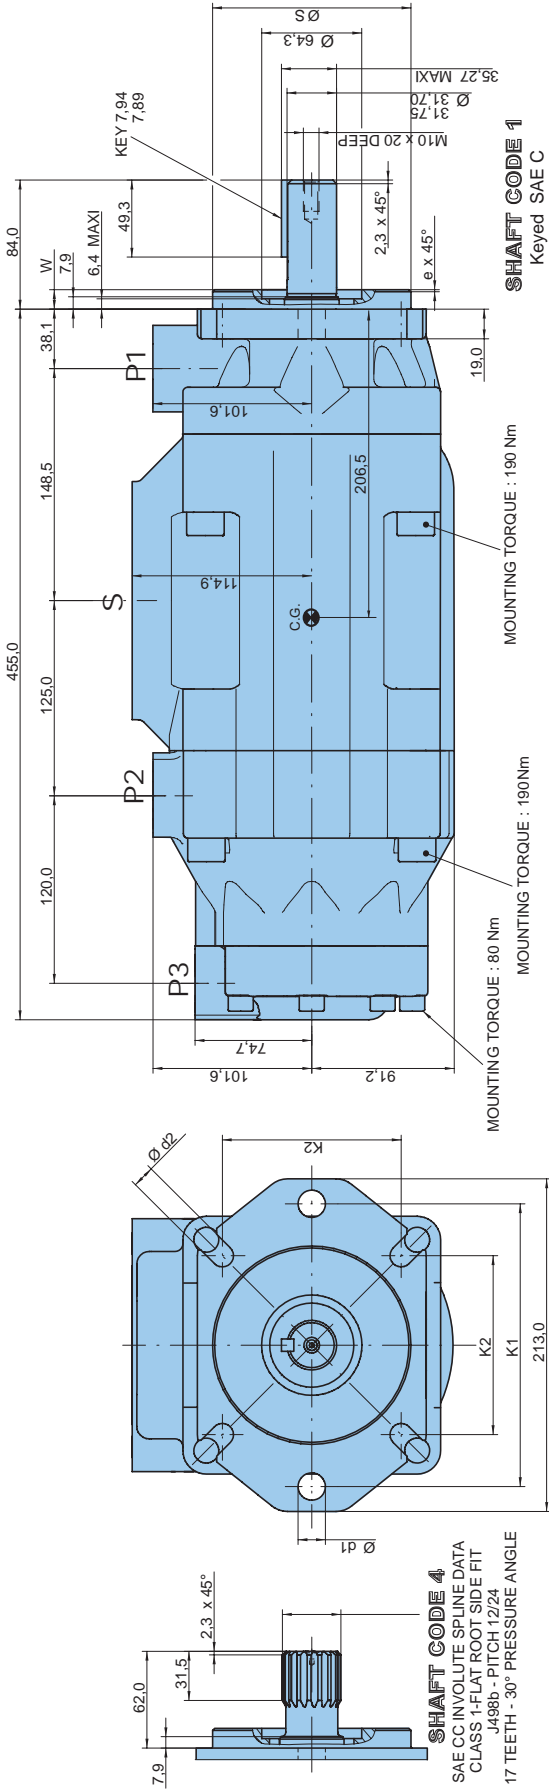

Alternate connect. variables	
	00 & M0 01 & M1
A	52,4
B	26,2
C	25,4

Series	Alternate mounting flange			
	Dia S	W	K1	K2
T7DDB	125.000	9.5	180.0	113.14
T7DDBS	127.000	12.7	181.0	114.50

Shaft torque limits [ml/rev. x bar]		
Shaft Vi x p max. P1 + P2 + P3	Shaft Vi x p max. P1 + P2 + P3	Shaft Vi x p max. P1 + P2 + P3
1	43240	4
2	72306	5
3	61200	